




L-05500-A0 Remote Audible/Visible Alarm	
Power Requirements	120 v, 60 Hz.
Indication Light	Flashing (Violation)
Lens	Large Red Beehive
Audible Alarm	Buzzer (Violation)
Electrical Connections	Two-Pole Terminal Block
Material	Polylac PA-765 (flame retardant ABS plastic)
Finish	Black Textured

The image displays two views of a black, cube-shaped LED light fixture. The top view shows a circular red lens with a 'CLEVELAND CONTROLS' logo. The bottom view shows a larger, teardrop-shaped red lens with a 'Hart Cleveland' logo.

A-08740 UNIVERSAL OPACITY MONITOR

L-05500-A0 REMOTE AUDIBLE/VISUAL ALARM

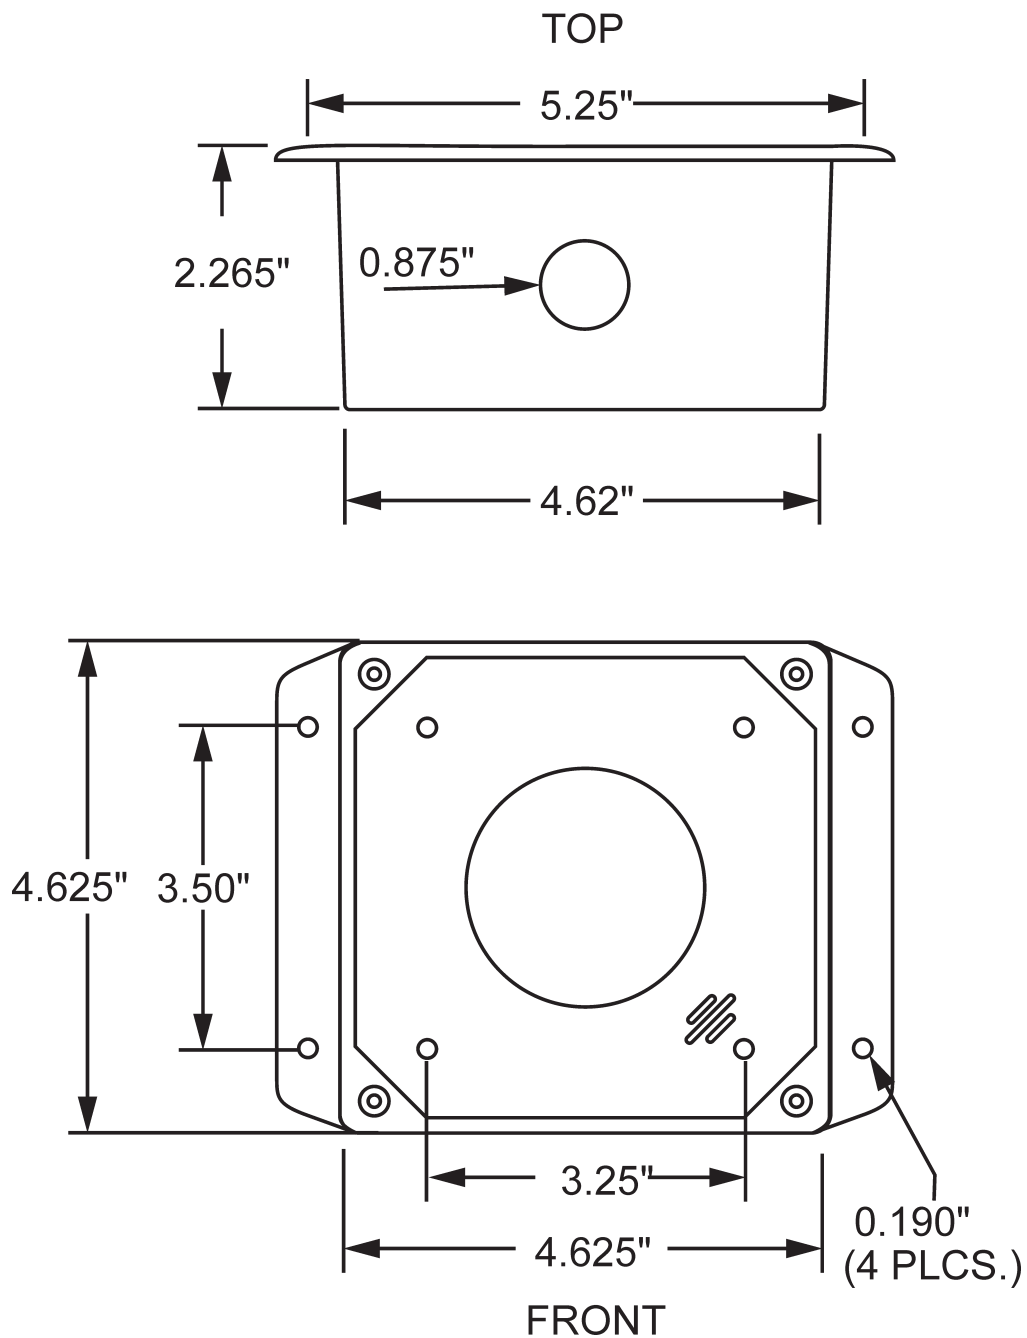

www.clevelandcontrols.com

Cleveland Controls
 1111 Brookpark Road
 Cleveland OH 44109
 Telephone: 216.398.4414
 Fax: 216.398.8558
 e-mail: salescombustion@clevelandcontrols.com

Are
 you reading
 a FAX or a COPY
 of this bulletin?
 DOWNLOAD the
 full-color PDF version
 of this and other
 literature at our
 website!